

- DLT Service Packer
- Retrievable Bridge Plug
- V-III Unloader Valve
- Storm Valve

SERVICE TOOLS



DLT Service Packer

DIC is an Exporter of DLT Service Packer in India. These are suitable for high-pressure, high-temperature service work.

DATASHEET:

Casing O / D		Cased Hole Size (in.)	Packer O/D (in.)	Packer I/D (in.)	Connection Box x Pin
Size (in.)	Weight (PPF)				
7.0 "	(17-23 #)	6.366-6.538	6.188	2.69	3 1/2 " EU
	(26-32 #)	6.094-6.276	5.954		
	(32-38 #)	5.920-6.094	5.781		
	(38-46.4 #)	5.626-5.920	5.525		
95/ 8 "	(32.3-43.5 #)	8.755-9.001	8.584	3.75	4 1/2 " EU
	(43.5-53.5 #)	8.535-8.755	8.365		
	(58.4 - 59.4 #)	8.407-8.435	8.250		
10 3/4 "	(51-55.5 #)	9.760-9.850	9.500	3.75	4 1/2 " EU
	(60.7 - 65.7 #)	9.560-9.660	9.375		
	(71.1-73.2 #)	9.406-9.450	9.125		
11 3/4 "	(60-71 #)	10.586-10.772	10.406	3.75	4 1/2 " EU
13 3/8 "	(48-77 #)	12.275-12.715	12.000	3.75	4 1/2 " EU
14 "	(82.5-92.68 #)	12.700-12.876	12.500	3.75	4 1/2 " EU



RBP-Retrievable Bridge Plug

We are Supplier & Exporter of Retrievable Bridge Plug in UAE. DIC- Retrievable Bridge Plug is a superior field-proven design.

DATASHEET:

Casing		Bridge		
O D (in./mm.)	Weight (lb/ft,kg/m)	I D (in./mm.)		Packer I D (in.)
		Minimum	Maximum	
4 1/2-114.3	9.50 to 13.5	3.920-99.57	4.090-103.89	3.750-95.25
5.0-127	11.5 to 15.0	4.408-111.96	4.560 -115.82	4.280-108.71
	18.0 to 20.8	4.156-105.56	4.276-108.61	4.000- 101.60
5 1/2-139.7	20.0 to 23.0	4.670 118.62	4.778 121.36	4.500 114.30"
	14.0 to 20.0	4.778-121.36	5.004-127.10	4.625-117.48
6 5/8-168.3	24.0 to 32.0	5.675-144.15	5.921-150.39	5.500- 139.70
7.00-117.8	26.0 to 32.0	6.094 154.79	6.276 159.41	5.875 149.23
	20.0 to 26.0	6.276 159.41	6.456 163.98	5.969 151.61
6 5/8-168.3	24.0 to 32.0	5.675-144.15	5.921-150.39	5.500-139.70
7.00-117.8	26.0 to 32.0	6.094 154.79	6.276 159.41	5.875 149.23
	20.0 to 26.0	6.276-159.41	6.456-163.98	5.969-151.61
7 5/8-193.7	24.0 to 29.7	6.875-174.63	7.025-178.44	6.672-169.47
	33.7 to 39.0	6.625-168.28	6.765-171.82	6.453-163.91
8 5/8 219.1	28.0 to 40.0	7.725 196.22	8.017 203.63	7.531 191.29
7 5/8-193.7	24.0 to 29.7	6.875-174.63	7.025-178.44	6.672-169.47
	33.7 to 39.0	6.625-168.28	6.765-171.82	6.453-163.91
8 5/8-219.1	28.0 to 40.0	7.725-196.22	8.017-203.63	7.531-191.29
9 5/8-244.5	40.0 to 53.5	8.535-216.79	8.835-224.41	8.250-209.55
10 3/4-273.05	40.5 to 45.5	9.95-252.73	10.05-255.27	9.30-236.22

SETTING FORCE GUIDE :

Size(in./mm)	Min. Foce Required at Plug(Lb/kg)
4-1/2-114.3	10,000-4536.00
5-127.0	10,000-4536.00
5-1 / 2-139.7	12,000-5443.00
6-5 / 8-168.3	14,000-6350.00
7.00-177.8	15,000-6804.00
7-5 / 8-193.7	18,000-8165.00
8-5 / 8-219.1	25,000-11340.00
9-5 / 8-244.5	25,000-11340.00



V-III Unloader Valve

DIC- V-III Unloader is designed as a high-pressure accessory for DIC-DLT Packer.


DATASHEET:

Size (in.)	Packer O D (in.)	Packer I D (in.)	Connection Box x Pin
3 1/2"	5.5	2.69	3 1/2 IF
4 1/2"	7.25	3.75	4 1/2 IF

Storm Valve

DATASHEET:

Size (in.)	Min I D (in/mm)	Max O D (in/mm)	Thread Connection Box up/Pin down
4 3/4" (120.65 mm)	1.49" (37.85 mm.)	4.75" (120.65 mm)	3 1/2" IF
6 1/8" (155.56 mm)	2.00" (50.8 mm.)	6.125" (155.58 mm.)	4 1/2" IF

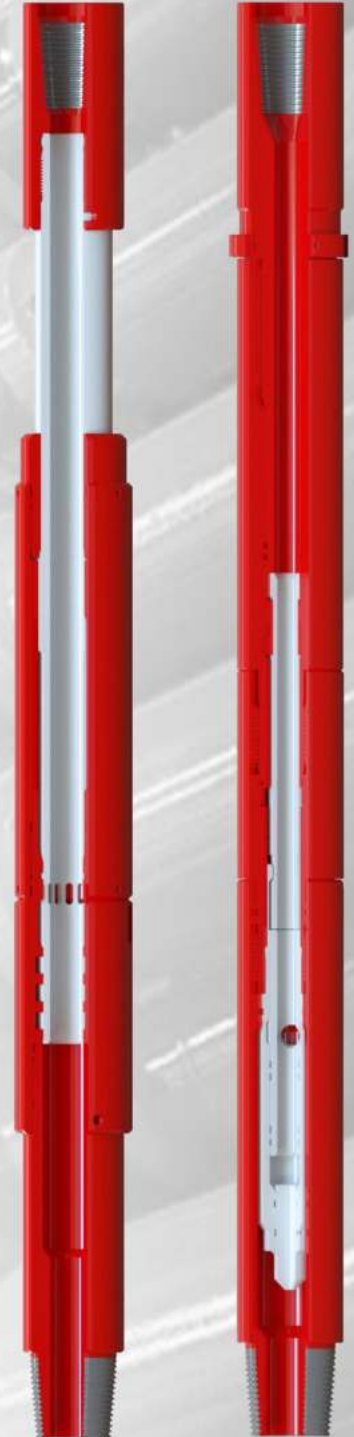

DIC - INDIA

DEDICATED IMPEX CO.

D - 189, Industrial Focal Point, Patiala,
147003 Punjab, India

info@dic-oiltools.com

+91-95922-28222 | +91-0175-2912701

DIC - UAE

DEDICATED IMPEX FZE

B.C. 1303260, Ajman Free Zone,
P.O. BOX: 47359, Ajman, UAE

info@dic-oiltools.com

(+971) 556721577



WE EXPORT WORLDWIDE

We Provide Innovative Solutions for Oil & Gas Industry